


Technical drawing of a mechanical part, likely a pump housing, showing a top view and a side view.

Top View Dimensions:

- Outer square frame: 60 (width) x 60 (height).
- Central circular feature: $\phi 70$.
- Four bolt holes: 4- $\phi 5.5$.
- Inner circular feature: 16.3 (diameter).

Side View Dimensions:

- Total height: 19.

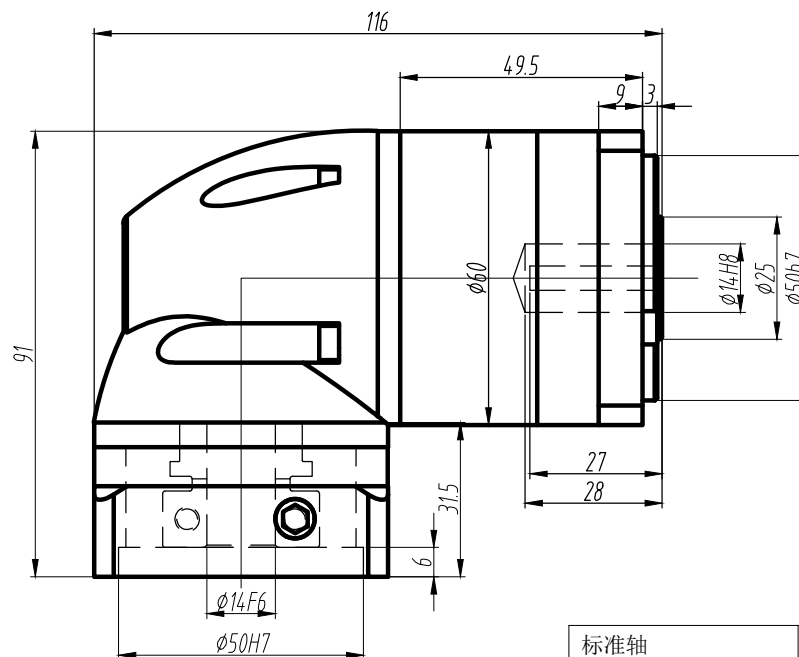

额定输出转矩 Nominal torquet	-----Nm	最大输出转矩 Max.output torque	-----Nm
额定输入转速 Rated input speed	3000rpm	最大输入转速 Max.input speed	8000rpm
最大径向力 Max.radial force	400N	输出转速100rpm, 输出轴长1/2处为受力 Speed 100rpm,Axial length 1/2 stress	
最大轴向力 Max.axial force	300N	输出转速100rpm, 输出轴长1/2处为受力 Speed 100rpm,Axial length 1/2 stress	
满载效率 Maximum efficiency	90%	使用温度 Operating temp	-25°~ +90°
安装方式 Installation method	任意 arbitrarily	润滑方式 Lubrication mode	长效润滑 Permanent lubrication
重量 Weight	1.5 Kg	寿命 Average life span	20000h
防护等级 Protection level	IP65	法兰精度 Flange accuracy	DIN 42955-R
标准侧隙 Standard backlash	≤ 11 arcmin	精密侧隙 Precise backlash	
输出键标准 Key standard	圆头普通平键 Round common flat key (A) GB1096-79		
齿轮精度等级 Gear precision grade	6 GB/T10095-2008		
电机功率 Motor power	400W		
电机安装尺寸 Motor dimensions	ø14*30/ø50*3/4-ø5.5-ø70		

[illegible]