


Technical drawing of a circular mechanical part, likely a flange or end view of a shaft assembly. The drawing shows concentric circles representing different diameters and features.


Key dimensions and features:

- Outer Diameter:** $\phi 100$ (indicated by a dimension line and arrow pointing to the outermost circle).
- Inner Diameter:** $\phi 22.5$ (indicated by a dimension line and arrow pointing to the innermost circle).
- Threaded Hole:** $4-M8 \times 16$ (indicated by a dimension line and arrow pointing to one of the four holes around the perimeter).
- Central Hole:** A small hole in the center, with a dimension of 6 (indicated by a dimension line and arrow pointing to the hole).
- Flange Thickness:** A dimension of 5 (indicated by a dimension line and arrow pointing to the thickness of the flange).

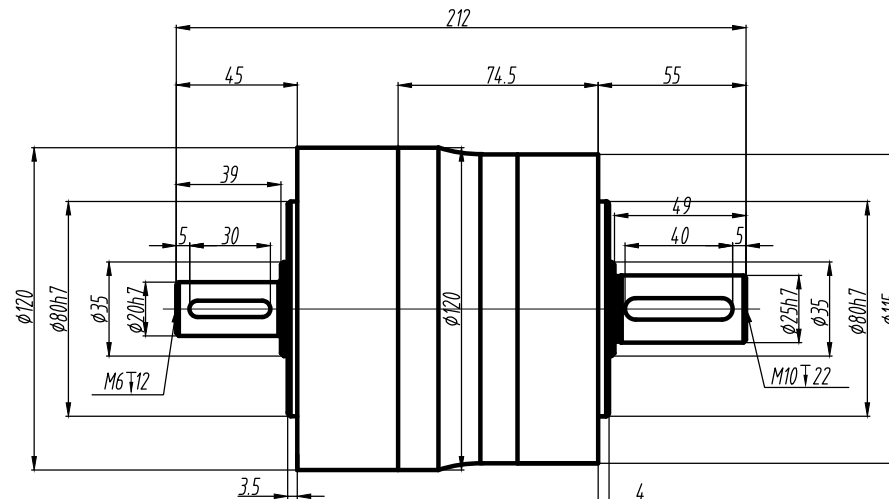

Technical drawing of a circular mechanical part, likely a flange or end view of a shaft. The drawing shows concentric circles representing different diameters. A central hole has a diameter of 8. A larger hole has a diameter of 28. The outermost circle has a diameter of 100. There are 12 holes arranged in a circle, with 4 of them having a diameter of 10. The drawing is labeled with dimensions and hole specifications.

技术参数 technical parameter			
额定输出转矩 Nominal torque	——Nm	最大输出转矩 Max.output torque	——Nm
额定输入转速 Rated input speed	3000rpm	最大输入转速 Max.input speed	5000rpm
最大径向力 Max.radial force	2200N	输出转速100rpm, 输出轴长1/2处为受力 Speed 100rpm,Axial length 1/2 stress	
最大轴向力 Max.axial force	1600N	输出转速100rpm, 输出轴长1/2处为受力 Speed 100rpm,Axial length 1/2 stress	
满载效率 Maximum efficiency	94%	使用温度 Operating temp	-25~ +90°
安装方式 Installation method	任意 arbitrarily	润滑方式 Lubrication mode	长效润滑 Permanent lubrication
重量 Weight	6.0 Kg	寿命 Average life span	20000h
防护等级 Protection level	IP65	法兰精度 Flange accuracy	DIN 42955-R
标准侧隙 Standard backlash	≤8arcmin	精密侧隙 Precise backlash	
输出轴标准 Key standard	圆头普通平键 Round common flat key (A) GB1096-79		
齿轮精度等级 Gear precision grade	6 GB/T10095-2008		
电机功率 Motor power			
电机安装尺寸 Motor dimensions			

标准轴 Standard output shaft							
		10	95.0				
		7	165.0				
		5	245.0				
		4	230.0				
		3	155.0				
		减速比(可选择)	额定转矩(Nm)				

						GSE120-L1-D	上海固佐			
标记	处数	分区	更改文件号	签名	年月日					
设计				标准化						
							 			
审核						数量			重量	比例
工艺										1:1
			批准							